


More than
just compact.

picoLinker™




"picoLinker™" is a light-weight monocular head mounted display and is used to connect to small PCs, smartphones, and wearable cameras via HDMI® input.

It is mainly for use in the industrial field but can also be used in daily life such as sports scene and others.

Our device with its smart design and intuitive operation is easy to mount and can be used by anybody.

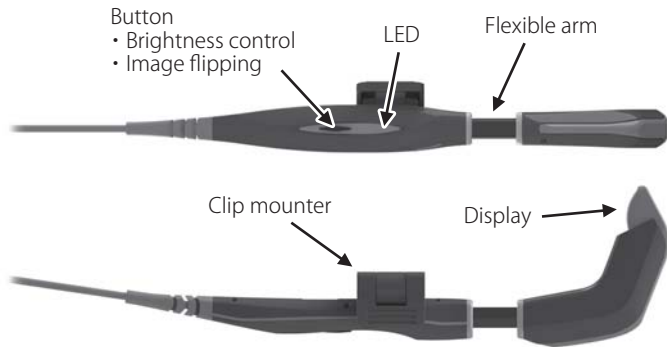

Examples of connecting

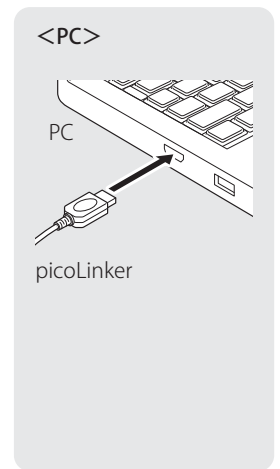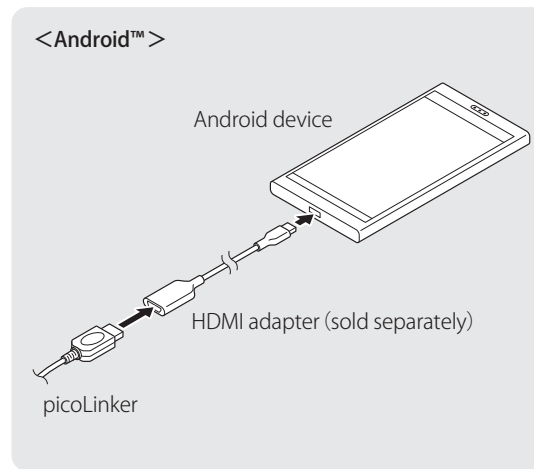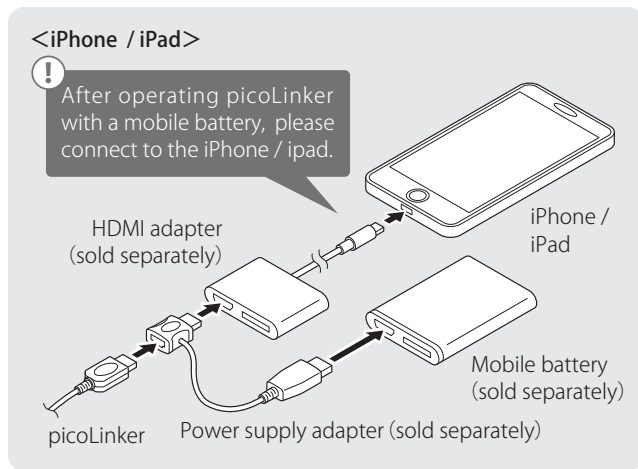

For more information about the picoLinker™, visit <https://www.westunitis.com>

SPECIFICATIONS WUZ-02A picoLinker™

Approximate weight	30g (except cable)	Image Input	HDMI input (1280 x 720p at 60fps, HDCP not supported) HDMI type A male connector
Resolution	nHD (640 x 360)	Waterproof performance	IPX4
Aspect ratio	16 : 9	Can be fitted to either of the right eye or the left eye	
Field of view (approximate)	16 . 7 degrees	No audio output	

The device to which you connect must support USB Type-C (Lightning for iPhone / iPad) and Alternate Mode.
Product specifications may change without notice.

●picoLinker™ is a trademark of WESTUNITIS CO., LTD. ●The terms HDMI® is a trademark or a registered trademark of HDMI Licensing LLC in the United States and other countries. ●iPhone and iPad are trademarks of Apple Inc., registered in the U.S. and other countries. ●All rights not specified in this manual belong to their owners.

ACCESSORIES

- Quick guide
 - picoLinker storage case
 - Clip mounter
 - Non-prescription glasses
-